


PIASINI engineering

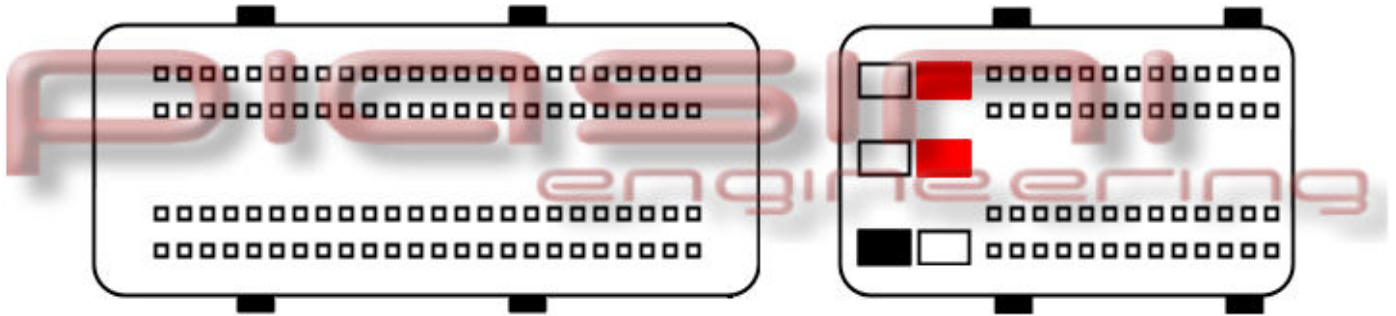

Connect as below:


Serial Suite:

ECU Plug:


Red
Black

to
to


2 Pins Red (Power Supply +12 Volt)
1 Pins Black (Ground)

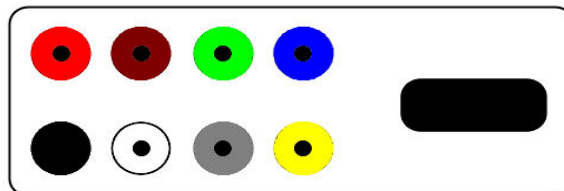




Where to connect the flat cable:

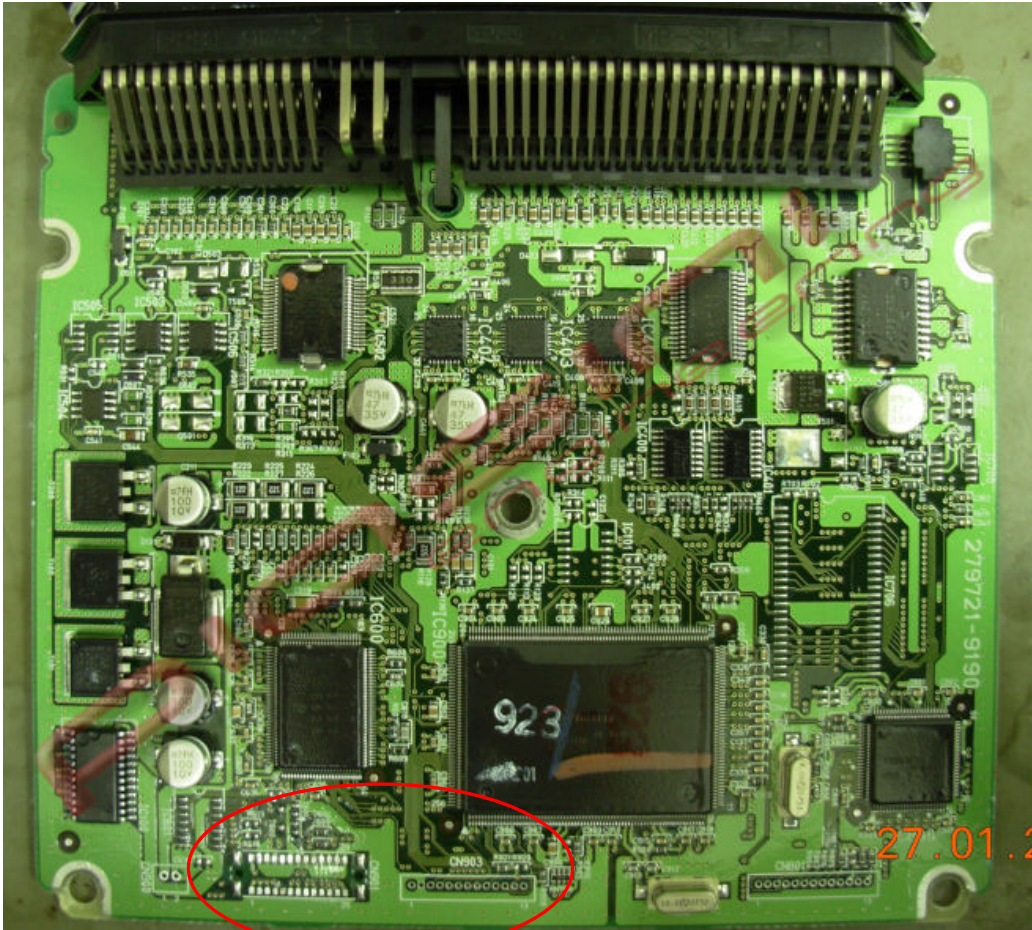



Backside:

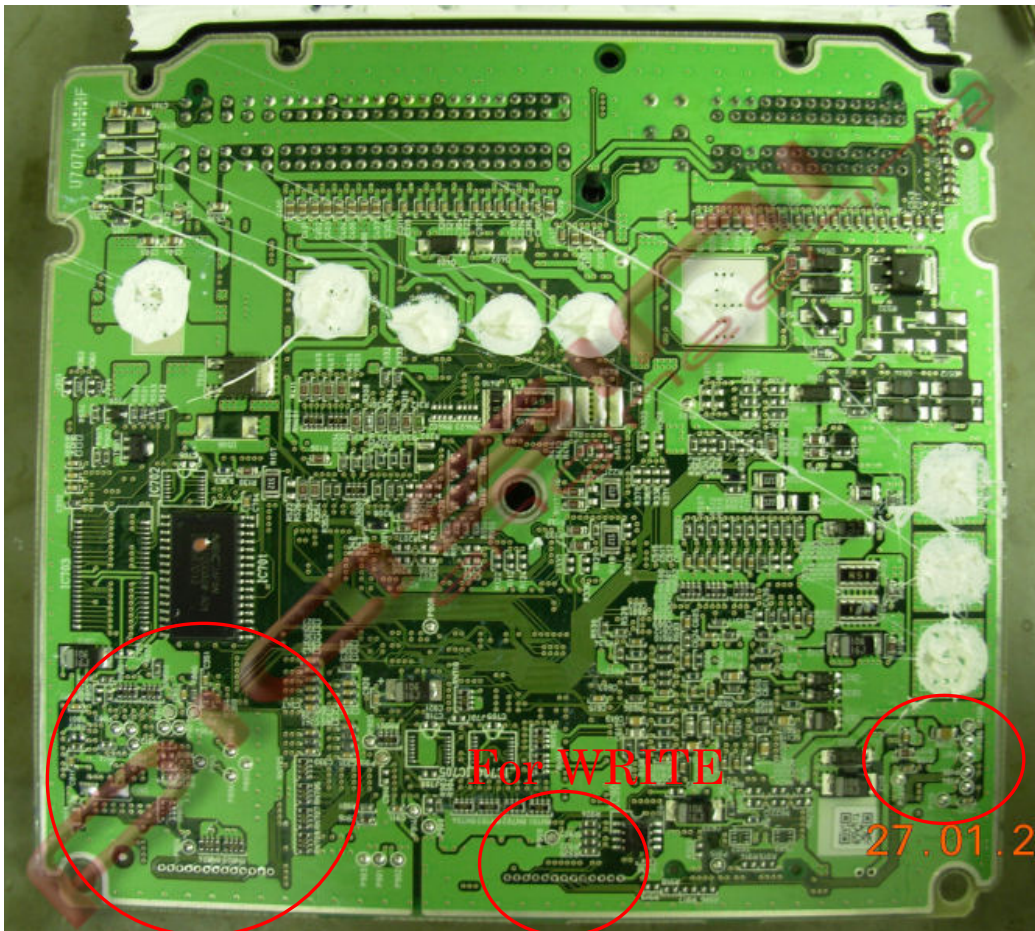

READ the ECU:

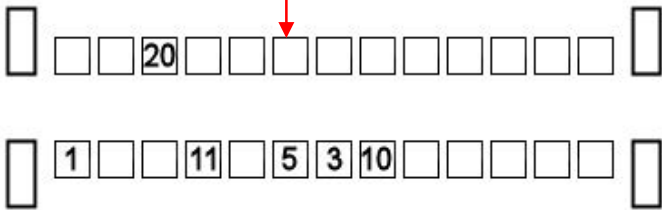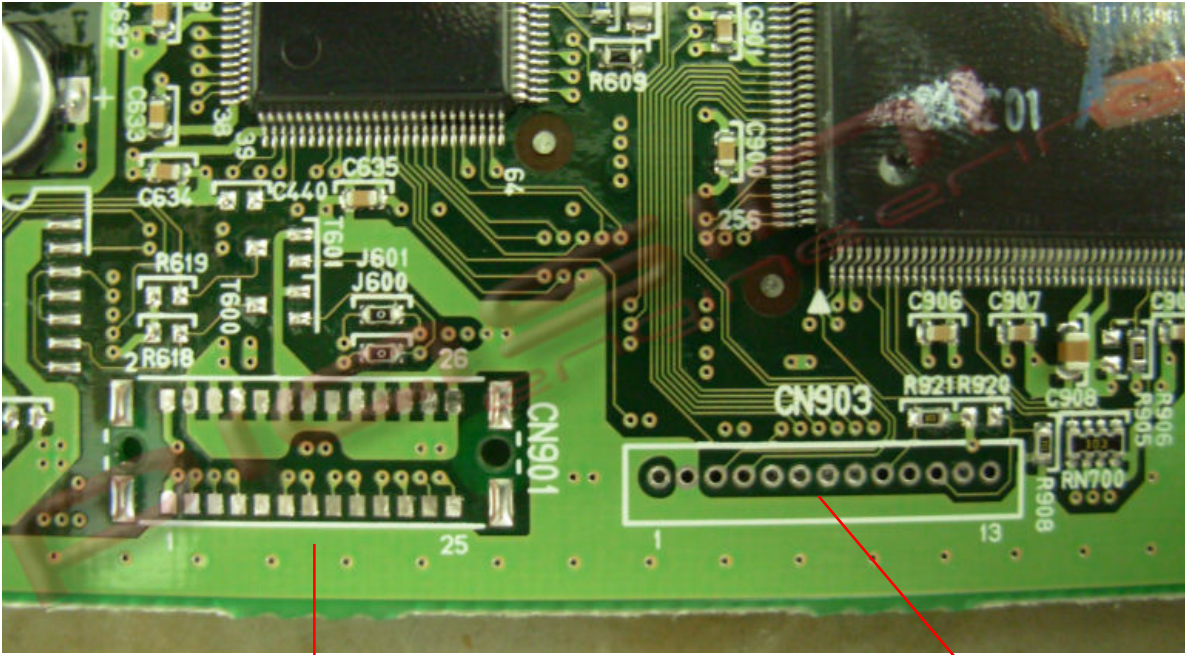

Backside:

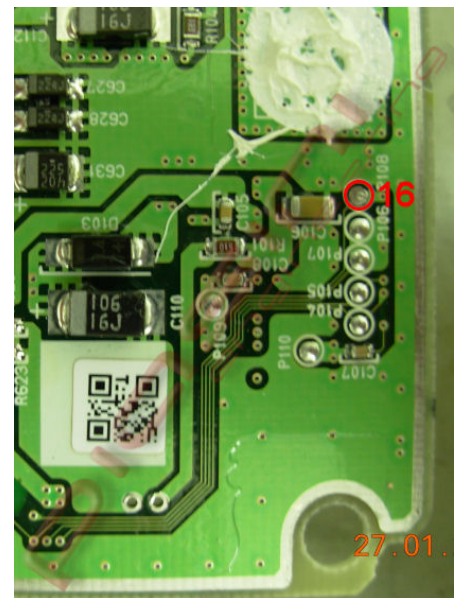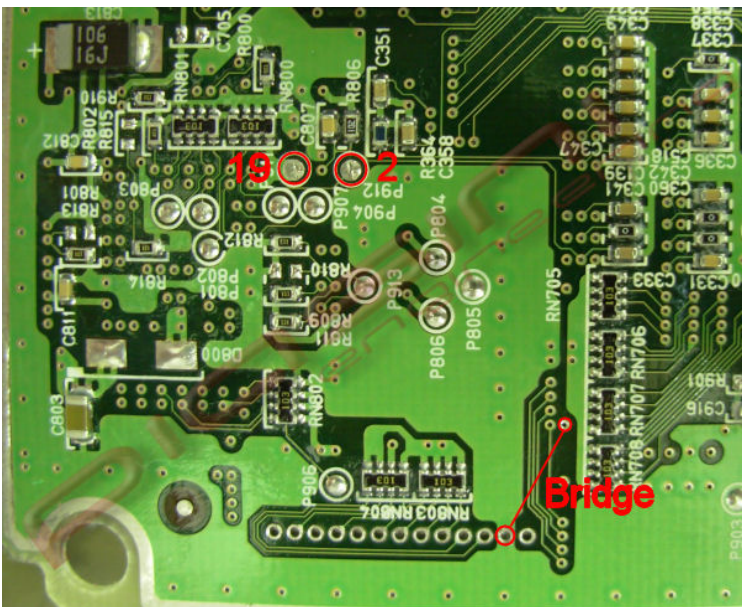

1. Connect the flat cable like in the picture;
2. Put 1 wire (bridge) like in the picture;

WRITE the ECU:

You have to **remove 1 bridge used before** in the backside of ECU and to put 2 wire (**bridge**) like in the picture, the **flat cable is still connect**.

