

PIASINI engineering



Connect as below:


Serial Suite:

ECU Plug:


Red
Black

to
to


2 Pins Red (Power Supply +12 Volt)
1 Pins Black (Ground)

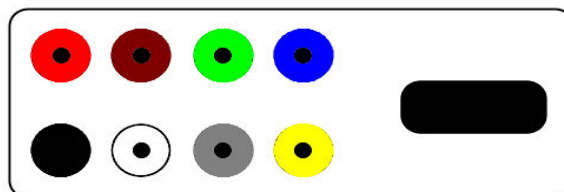

Where to connect the flat cable:

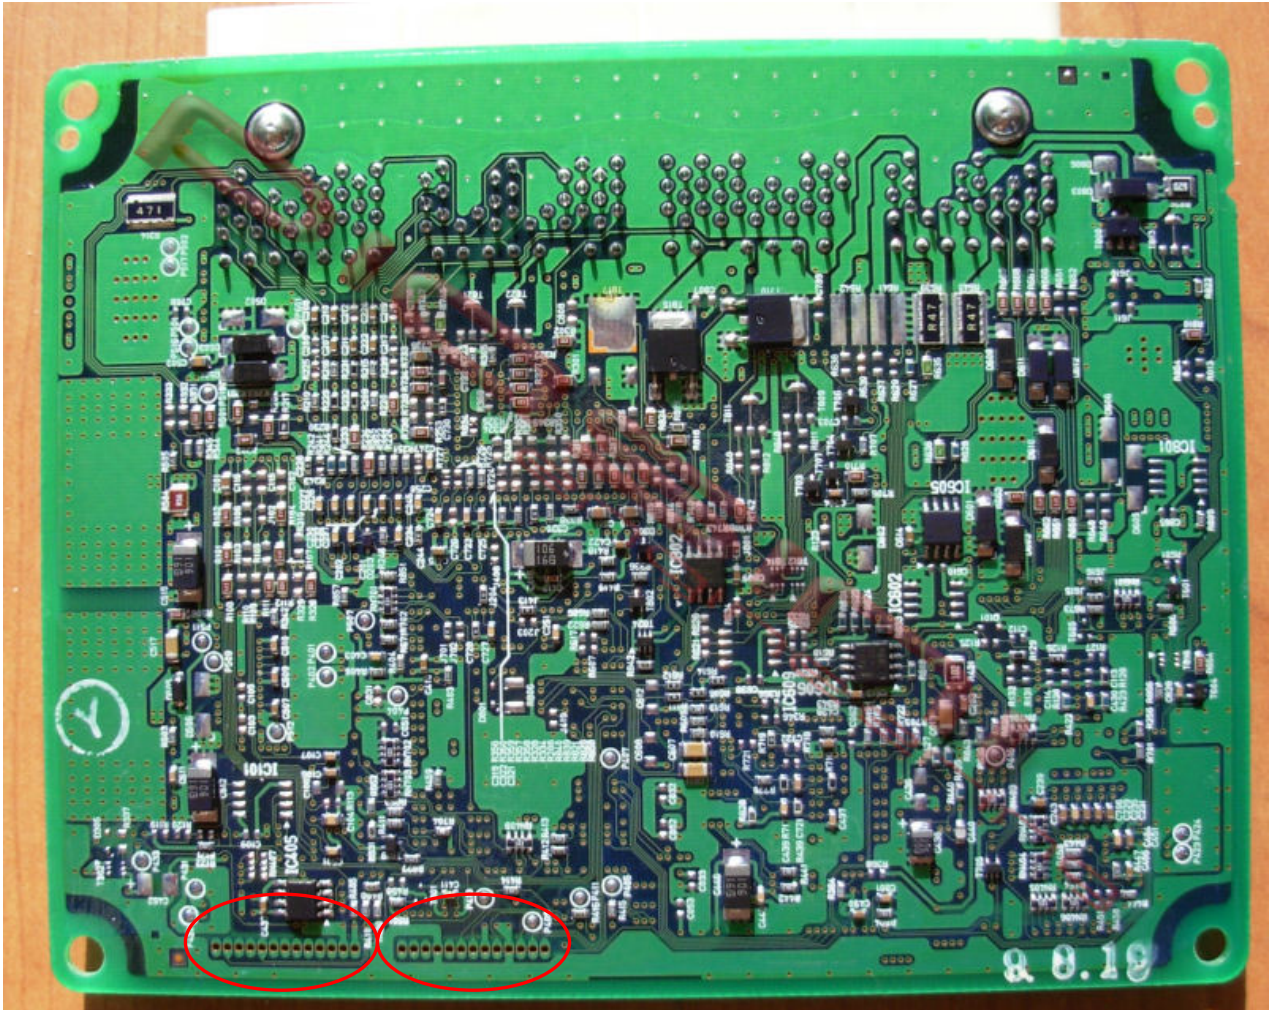

READ the ECU:

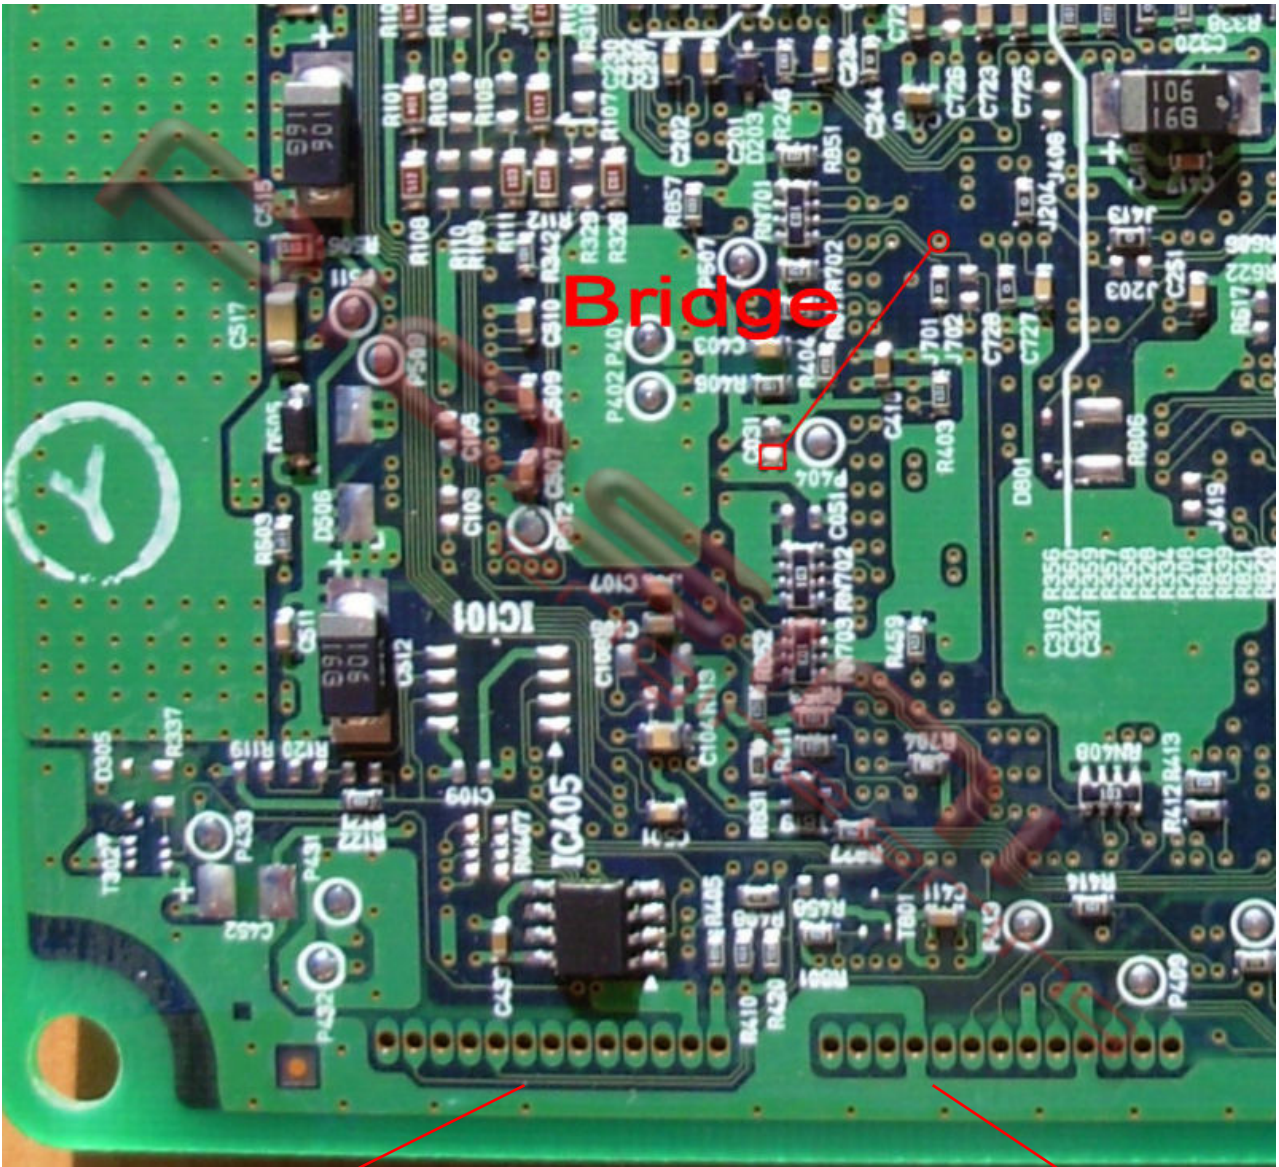


□ 5 □ 10 □ 12 13 14 15 11 3 20 □

□ □ □ □ □ □ □ □ 19 □ 2 16 □



Put a wire (bridge) like in the picture, then connect the flat cable pin following the number like in picture.

WRITE the ECU:

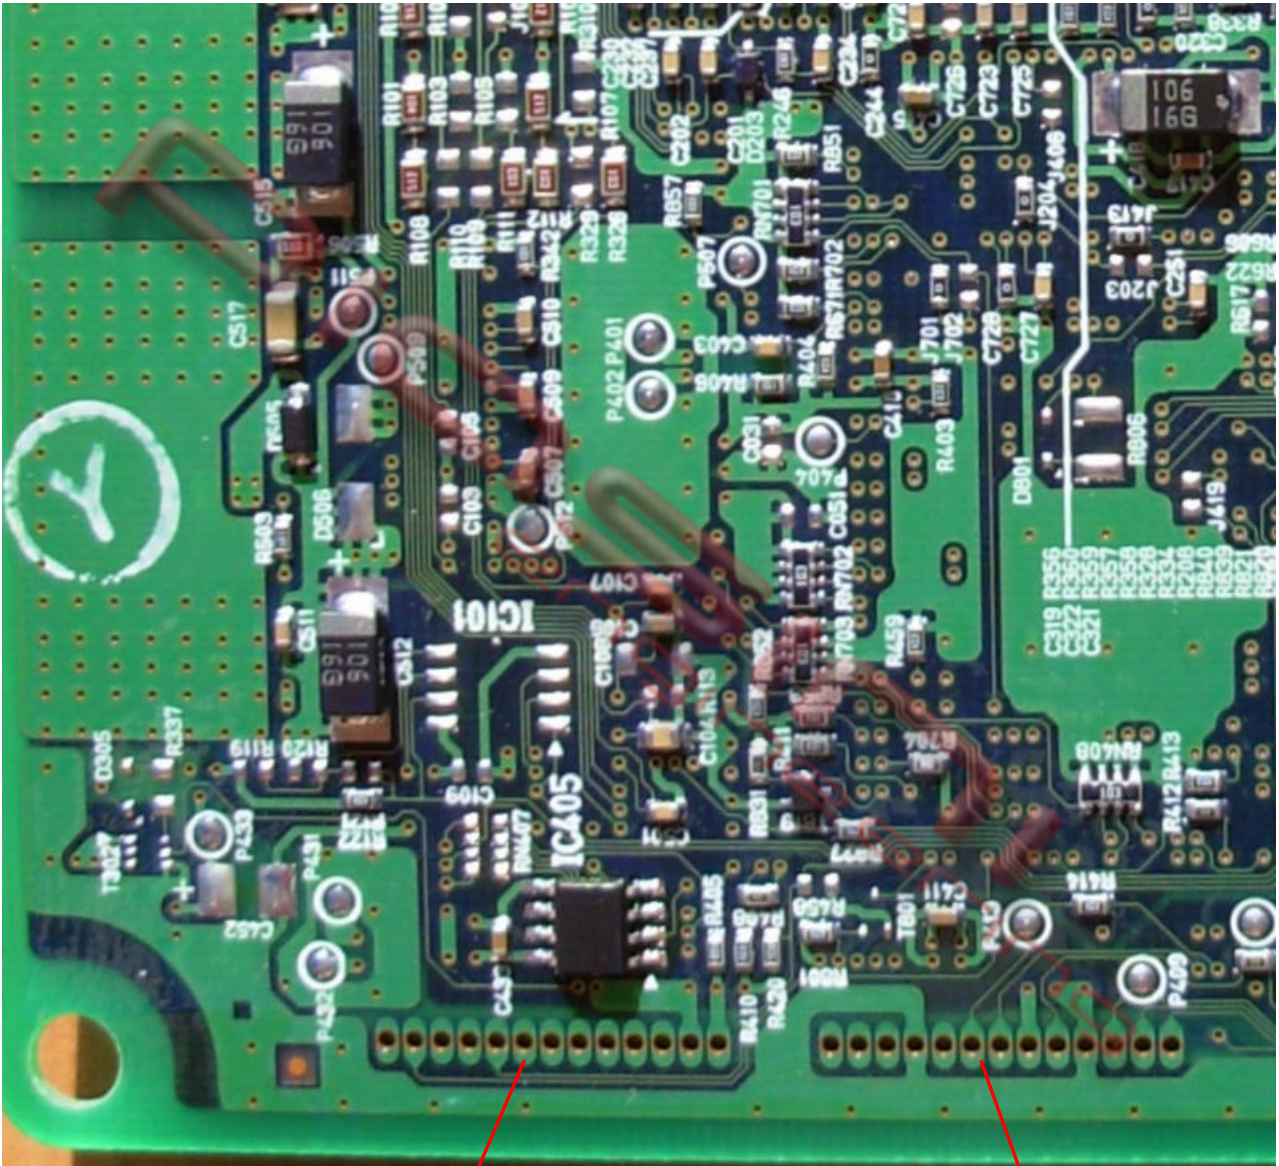

You have to **remove the bridge used before**, and put another 2 wire(Bridge) like in the picture.

